


Product specification sheet SP19

SP19

Material: Polypropylene (0,193 W/mK), stainless steel (25 W/mK)

Colors: RAL 7035, RAL 7040, RAL 8003, RAL 8016, RAL 9005, RAL 9016

Certifications: EN 1279 2, 3 & 4

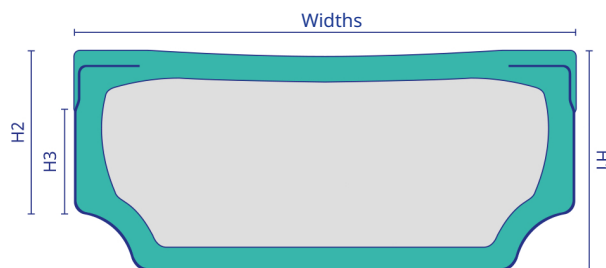

Spacer bar	Widths ± 0.15 [mm]	H1 ± 0.15 [mm]	H2 ± 0.15 [mm]	H3 Butyl area [mm]	Theoretical desiccant quantity [g/m]
10 mm	9.45	6.85	5.10	3.64	from 21 to 30
12 mm	11.45				from 25 to 35
14 mm	13.45				from 34 to 45
16 mm	15.45				from 41 to 51
18 mm	17.45				from 46 to 59
20 mm	19.45				from 54 to 64

	Specification	Test method
	5000 or 6000 mm +10/-0 mm	Measuring tape
	0.20 mm +0.3/-0.1 mm	Electronic digital caliper
	≥ 8 kg	Dynamometer
	$\lambda_{eq} 2B = 0,50 \text{ W/(mK)}$	Test at <i>ift Rosenheim</i> according to EN 12664:2001-01

	Specification	Test method
	Inlet pressure 5 bar ≥ 2 bar - ≤ 4 bar	Manometer
	< 0.02 %	Test at <i>ift Rosenheim</i> according to EN 1279-4 Annex H
	Conform to the standard after 4000 h	EN ISO 4892-2
	$Rp0.2 \geq 24 \text{ N/mm}^2$ reference SP19 16 mm	3 point bending test