


**Product
specification sheet
SP18**

SP18

Material: Polypropylene (0.193 W/mK), stainless steel (15 W/mK), steel wire

Colors: RAL 7035, RAL 7040, RAL 8003, RAL 8016, RAL 9005, RAL 9016

Certifications: EN 1279 2, 3 & 4, EN ISO 4892-2, DTA, BF - Data sheet and RAL quality mark.

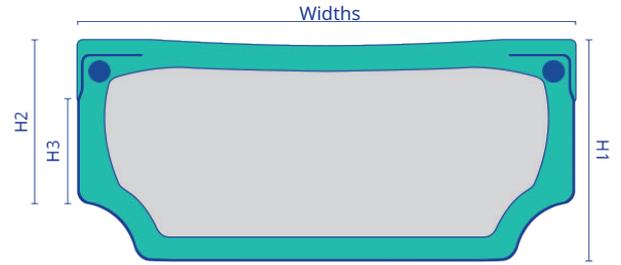

Spacer bar	Widths ± 0.15 [mm]	H1 ± 0.15 [mm]	H2 ± 0.15 [mm]	H3 Butyl area [mm]	Theoretical desiccant quantity [g/m]
SP18 - 12 mm	11.45				from 25 to 35
SP18 - 14 mm	13.45				from 34 to 45
SP18 - 15 mm	14.45				from 38 to 48
SP18 - 16 mm	15.45	6.85	5.10	3.64	from 41 to 51
SP18 - 18 mm	17.45				from 46 to 59
SP18 - 20 mm	19.45				from 54 to 64

	Specification	Test method
	6000 mm +10/-0 mm	Measuring tape
	0.20 mm +0.3/-0.1 mm	Electronic digital caliper
	≥ 8 kg	Dynamometer
	$\lambda_{eq,2B} =$ 0,31 W/mK	Test at ift Rosenheim according to EN 12664:2001-01

	Specification	Test method
	Inlet pressure 5 bar ≥ 2 bar - ≤ 4 bar	Manometer
	< 0.02 %	Test at ift Rosenheim according to EN 1279-4 Annex H
	Conform to the standard after 4000 h	EN ISO 4892-2
	Rp 0.2 ≥ 48 N/mm ² reference SP18 16 mm	3 point bending test

Technoform Glass Insulation Italia srl, Succursale France

ZAC des Grandes Terres, 471 rue Antoine Pinay
69740 Genas, France
T +33 (0)4 37 91 10 00 | F + 33 (0)4 78 18 73 60
E info.tgjfr@technoform.com

**Thermal edge bond solutions
for insulating glass**